


Jun 1, 2009

New model Release ISDB-T module (PIX-XT041-ZZ0)

■Features

- **Ultra compact size (Business Card Size)**
84.0mm x 55.0mm

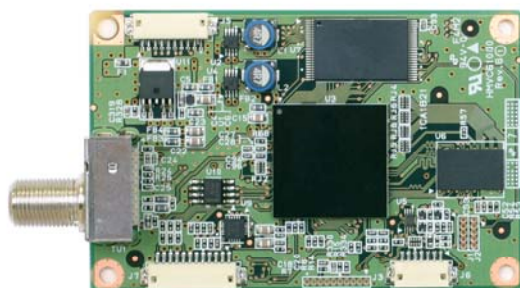

PIX-XT041-ZZ0 compared with B-CAS Card

- **Low power consumption**
3.5W (Max)
- **High Quality (Made in Japan)**
- **Low cost**
- **Smart Design User Interface**
- **Easy operation EPG**
Supports newspaper-style
Supports zoom in/zoom out
Supports other on-air program guide
- **ARIB Regulation Compliance**
- **Control protocol compatible with PIX-DT040 series**
You can shorten the development period.

■Spec

Model number	PIX-XT041-ZZ0	
Dimensions	84.0mm x 55.0mm	
Operating temperature/Humidity	0 ~ 60°C / 20 ~ 80%RH	
Power	Operation voltage	5.0V
	Power consumption	3.5W(Max)
Tuner	System	ISDB-T
	Frequency	90MHz ~ 770MHz
Video output※ 1	Component (YPbPr) 480i / 480p / 1080i / 720p	
	S-Video(Y/C)	
	CVBS	
Audio output	Analog L/R	
	SPDIF	
Host interface	UART 19200bps	
B-CAS	B-CAS (Smart card) interface	
Function	Subtitles / Switch sounds / Switch videos / EPG (Newspaper-style/on-air) On air download(ES) / EWS / Text superimpose	
Other	No support of BML and interactive communication	

※1 Video output is exclusive.